

# **U★P★ TRUCK CENTER, INC.**

**MEDIUM & HEAVY TRUCK SALES & SERVICE**

4920 Menominee Street, P.O. Box 261

Quinnesec, MI 49876

Phone: (906) 774-0098 or (888) 744-8797




## **» 110XL LOADER**

PRELIMINARY SPECIFICATIONS




The Barko® 110XL Loader delivers high payload at a low total cost of operation. Equipped with standard features that set it apart from the competition, the 110XL lasts longer and works harder to deliver the results you demand.

## SPECIFICATIONS

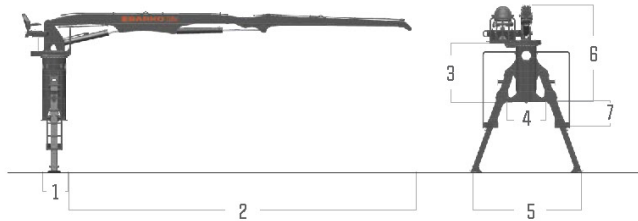

DIMENSIONS	
1	2' 1.625" (65 cm)
2	27' 5" (836 cm)
3	5' 3" (158 cm)
4	3' 2" (97 cm)
5	10' 3" (312 cm)
6	8' 2" (247 cm)
7	2' 11" (89 cm)
<b>Total Operating Weight</b>	
6,120 lbs (2,776 kg) loader with cylinders - excluding grapple and options	
POWER	
<b>Source</b>	Customer supplied power take-off
HYDRAULICS	
<b>Pump</b>	Triple gear pump producing 26/21/15 GPM (98/79/57 LPM) at 1,600 RPM
<b>Operating Pressure</b>	3,200 psi (220 bar) main system
<b>Valves</b>	Sectional control type with folding mechanical joysticks
<b>Features</b>	Heavy-wall tubing with high pressure hoses; independent swing system with direct-linked foot controls; rotary manifold to allow continuous rotation
SWING SYSTEM	
<b>Rotation</b>	Continuous rotation on 27" (686 mm) external tooth turntable bearing; foot pedal control
BOOM	
<b>Structure</b>	Fabricated box style design with all welded construction and wear plates; bronze bushing with grease grooves at boom pivot points
<b>Standard Boom</b>	29' (884 cm)
<b>Horizontal Reach</b>	28' 5" (866 cm)
<b>Cylinders</b>	Hydraulic cylinders with spherical bearings; heavy wall honed steel tubing; heat-treated cylinder rods with heavy chrome plating
OPTIONS	
Spacers to accommodate various frame heights Oil cooler kit with 12-volt fan Left hand platform	45 gal. (170 L) hydraulic tank with return line filters Remote in-line hydraulic filter LED boom lights (2)

## BOOM SWEEP

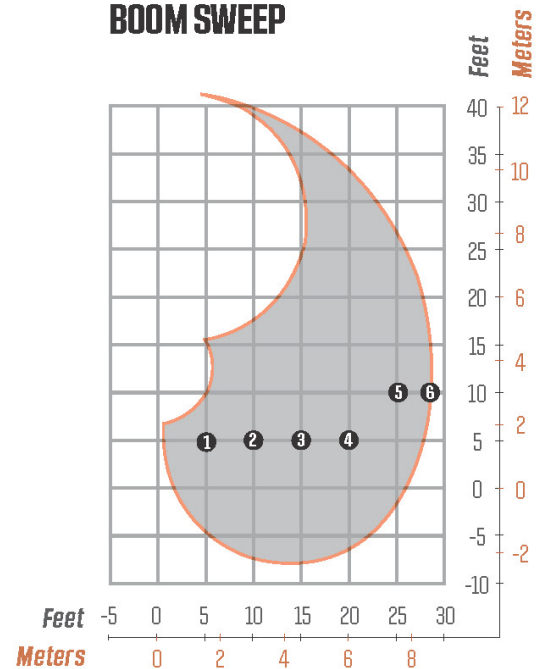

### MAXIMUM FRONT LIFT CAPACITY

29' (8.8 m) straight boom, less attachment.

	Radius	Lift		Radius	Lift
1	5' (1.5 m)	3,110 lbs (1,411 kg)	4	20' (6.1 m)	6,050 lbs (2,744 kg)
2	10' (3.0 m)	12,100 lbs (5,488 kg)	5	25' (7.6 m)	4,810 lbs (2,182 kg)
3	15' (4.6 m)	8,100 lbs (3,674 kg)	6	Full Reach	1,770 lbs (803 kg)

## STANDARD FEATURES

### OPERATOR PLATFORM

Rotating platform with beneath-the-seat style valve mounting and foot swing pedal  
8-pass electrical collector

Comfortable, locking, fold-down seat with armrests

### STABILIZERS/SUBFRAME/PADS

Telescopic stabilizers with 43" (109 cm) stroke cylinders  
Bolt on stabilizer housings

Dual stabilizer controls for ground or platform operation

### STANDARD FEATURES

Mounting hardware supplied  
Dual ladders  
Load securing posts  
Fold down joysticks

Continuous rotation for electric and hydraulic  
House lock safety pin

\* Specifications are subject to change.



**BARKO HYDRAULICS, LLC**

One Banks Ave.  
Superior, WI 54880

P: 715.395.6700  
info@barko.com | www.barko.com

**U.P. TRUCK  
CENTER, INC.**

**MEDIUM & HEAVY TRUCK SALES & SERVICE**

**4920 Menominee Street, Quinnesec, MI 49876**


**Phone: (906) 774-0098 or (888) 744-8797**



Visit Our Website At: [www.uptruckcenter.com](http://www.uptruckcenter.com)



**BARKO**



## **110XL LOADER**



The Barko® 110XL Loader delivers high payload at a low total cost of operation. Equipped with standard features that set it apart from the competition; the 1100 lasts longer and works harder to deliver the results you demand.

- **Estimated Weight 6,300lbs Excluding Grapple & Options**
- **Triple Gear Pump - 3,200 PSI**
- **Continuous Swing**
- **Joystick & Foot Pedal Controls**
- **29 Ft. Boom**
- **Lifts 12,100#'s At 10 Ft.**
- **Dual Stabilizer Controls For Ground Or Platform Operation**

**AVAILABLE NOW AT U.P. TRUCK CENTER, INC.**  
**CALL US TODAY!!! (906) 774-0098**